


Avery Dennison F5712L is a mirrored mechanical diaper closure system, incorporating hook elements and a layer nonwoven.

- Nonwoven carrier offers a premium touch and feel to the end-user.
- Soft, but aggressive, super hook element used for high peel performance onto multiple loop landing zones, and particularly onto Avery Dennison Luma-Fix™ nonwoven loop.
- Simple product design is convenient to position onto diaper ear.
- Flagging of open tapes during conversion eliminated with balanced adhesive stripes next to the hook.
- Product supplied in a self-wound roll format.

CONSTRUCTION:

1. White, soft nonwoven, 90 mm
2. Two functional hook areas with 10 mm hook in three lanes
3. Soft fingerlift area, 15 mm

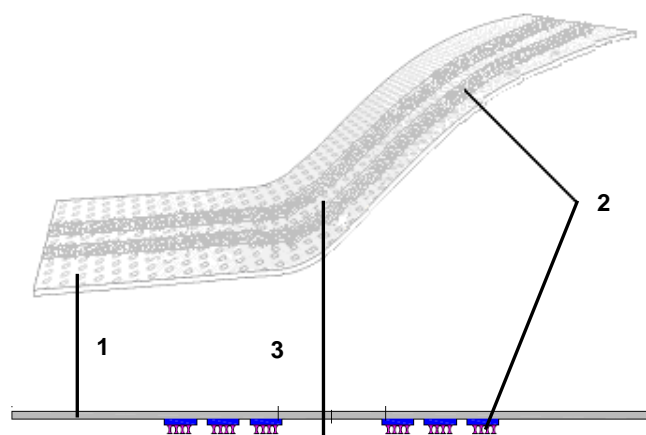

STANDARD FORMAT:

- Roll width: 90 mm
- Roll length: 850 linear meter (up to 1100)
- Inside diameter of the core: 153 mm / 6 inches (76 mm / 3 inches upon request)
- Outside diameter of the roll: 842 mm (up to 953)

PACKAGING:

- Standard export packaging
- Pallet size is 1200 x 1000 x 1190 mm (height)
- Number of rolls per pallet: approx 9



Avery Dennison F5712L

Physical Properties	Typical Values	Test Methods
PRECOMBINED TAPE		
Roll unwind release	Low	
FASTENING TAPE		
180° Peel hooks/ Avery Loops (peak)	240 N/m	T04/612
37°C Shear hooks/Tape	>60 Min.	T03/108

Note: The listed values are typical only and not intended to serve as product specifications. Test procedures conform PSTC – ASTM – ISO.

STORAGE AND SHELF LIFE:

The shelf life of the product is one year when stored in original packaging at 15°C-30°C, 30-70% relative humidity and out of direct sunlight.

IMPORTANT:

Information on the above characteristics is based upon tests we believe to be reliable. The values given are typical values that vary according to application conditions. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine prior to use the suitability of this material for their specific purposes. All Avery Dennison materials described herein are sold subject to Avery Dennison Conditions of Sales, a copy of which is available upon request.

Please refer to [Tapes.AveryDennison.com](https://www.tapes.averydennison.com) for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2018 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469

For more information on our bonding tapes and adhesive solutions, visit [Tapes.AveryDennison.com](https://www.tapes.averydennison.com)