

### DESCRIPTION

*Avery Dennison® F6612W* is a big S cut diaper tape system, incorporating with soft hook elements and a layer nonwoven. The mechanical closure provides to the end-user additional security and ease-of-use over the traditional tapes. The product is supplied as a single roll.

### CONSTRUCTION


- 1 white soft non-woven: 90mm
- 2 Super-hook elements: 20mm

### 产品描述

*Avery Dennison® F6612W*是一种由柔软魔术搭扣及一层柔软无纺布组合而成的用于可抛弃纸尿裤的大S切侧腰贴。相对于传统的胶带, 魔术搭扣更加安全且方便最终用户使用。

### 结构组成

- 白色柔软的无纺布: 90mm
- 超级魔术搭扣: 20mm

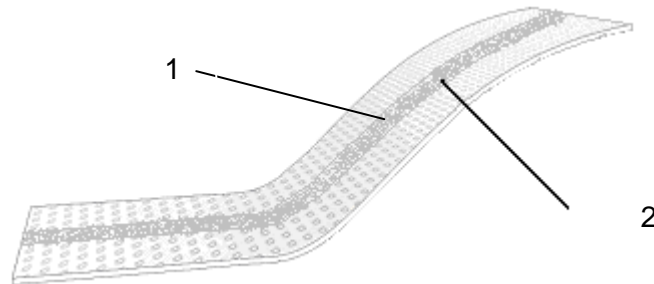

### FEATURES & BENEFITS

- The nonwoven-like fastening tape adds a new soft element to the closure system.
- A new, more aggressive hook element is used for better peel performance onto multiple loop landing zones.
- Simple product design is convenient to position onto diaper ear.

### 产品的特点与优点

- 无纺布的固定胶带使整个侧腰贴更加柔软
- 新型的超级魔术搭扣可与各种类型的Loop配合, 提供更佳的剥离性能
- 简练的结构设计便于客户在复合左右贴定位

### STANDARD FORMAT

#### Disc Roll/饼卷

Roll width/ 卷宽: 90mm  
Roll length/卷长: 500 m

#### Spool-wind Roll/毛线卷

Roll width/ 卷宽: 90mm  
Roll length/卷长: 1500 m

### 产品规格

Inside diameter of the core/内径: 76 mm  
Outside diameter of the roll/外径: 610 mm

Inside diameter of the core/内径: 152 mm  
Outside diameter of the roll/外径: 500 mm

**PHYSICAL  
PROPERTIES**  
物理性能

**TYPICAL  
VALUES**  
典型数值

**UNITS**  
单位

**TEST  
METHODS**  
测试方法

**Tape/胶带:**

90° Peel Hooks/Avery Loops( peak )  
(90° 剥离力魔术搭扣 vs. 魔术前贴)

180

N/m

T04/612

180° peel Hook/Nonwoven

(180° 剥离力魔术搭扣 vs. 无纺布)

280

N/m

T04/605

**STORAGE and SHELF LIFE**

One year when stored in original packaging at 21°C (70° F), 50% relative humidity and out of direct sunlight.

**产品的储存及有效期**

在 21°C(70°F), 相对湿度 50%, 避免被阳光直射条件储存。在上述条件下未开封的本产品可存放一年。

**IMPORTANT**

Information on the above characteristics is based upon tests we believe to be reliable. The values given are typical values that vary according to application conditions. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine prior to use the suitability of this material for their specific purposes. All Avery Dennison materials described herein are sold subject to Avery Dennison's Conditions of Sales, a copy of which is available upon request.

**说明**

上述性能信息是基于我们认为可靠的测试, 所得出的数值是典型值, 在不同的应用条件下会有变化。所有数值仅作为信息参考, 并不构成保证或担保。任何买方应在使用前已独立确定该产品对其具体用途是否适用。此处描述的所有艾利丹尼森材料受限于艾利丹尼森的销售条款, 如有要求我们可提供副本。

Please refer to **Tapes.AveryDennison.com** for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2015 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance  
Tapes

**Asia Pacific**  
Kunshan, China,  
NO. 618 Nanhe Road  
Kunshan Economic &  
Technological Zone  
China, 215335  
Phone: +86 512 57155001  
Fax: +86 512 57155059

**Europe**  
Tieblokkenlaan 1  
B-2300 Turnhout  
Belgium  
Phone: +32 (0)14 40 48 11  
Fax: +32 (0)14 40 48 55

**North America**  
250 Chester Street  
Painesville, Ohio  
44077 USA  
Phone: +1 866-462-8379  
Fax: +1 888-358-4469

For more information on our bonding tapes and adhesive solutions, visit **Tapes.AveryDennison.com**