

DESCRIPTION

Avery Dennison® S4211T is a single coated tape with 2 adhesive-free fingerlift portion, designed as a reseal tape and supplied in selfwound rolls.

产品描述

Avery Dennison® S4211T是一种单面涂布胶带，有两段漏涂胶的手指剥离边。它是一种快易贴胶带，以自解卷的形式供应。


CONSTRUCTION

1	Clear polypropylene tape	28mm
	Clear adhesive-free fingerlift	3mm+3mm
2	synthetic rubber resin adhesive	22mm

结构组成

透明聚丙烯胶带	28mm
(漏涂胶的手指剥离边)	3mm+3mm
合成橡胶树脂胶粘剂	22mm

* All above dimensions are typical values for reference.

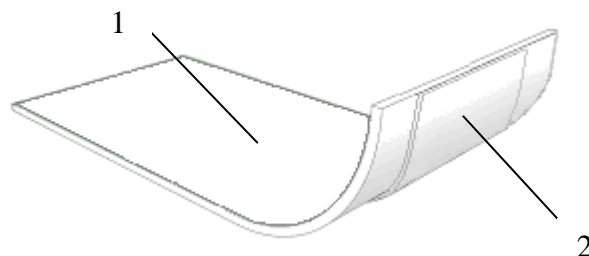

FEATURES & BENEFITS

- Controlled adhesive properties, excellent removable tape performance to a wide variety of substrates.
- Low tape release gives a good balance between the requirement for conversion and tab opening for the end-user.
- Our adhesive-free fingerlift design provides a cost effective way for easy opening and closing.

产品的特点与优点

- 优异的可移除胶带性能，应用于多种不同的材料。
- 胶带的离型力低，良好的平衡了成品转换和终端客户使用的需求。
- 漏涂胶的手指剥离边的设计为客户提供了一个简便有效的使用方式。

STANDARD FORMAT

Roll width / 卷宽: 28mm
Roll length / 卷长: 1200 m

产品规格

Inside diameter of the core / 内径: 76 mm
Outside diameter of the roll / 外径: 430 mm

PACAKAGING

Pallet Size / 栈板尺寸: 1000 X 1140 mm
1. No. rolls(bulk package)/pallet: 130 rolls/pallet
大包装卷数: 每托 130 卷

包装

2. No. rolls (box) / pallet: 96 rolls/pallet
箱装卷数: 每托96卷

**PHYSICAL
PROPERTIES**
物理性能

**TYPICAL
VALUES**
典型数值

UNITS
单位

**TEST
METHODS**
测试方法

Adhesive properties / 胶粘剂性能:

90° peel on stainless steel / 在不锈钢板上的 90°剥离力	200	N/m	T04/139
Roll unwind / 解卷力	low		

STORAGE and SHELF LIFE

One year when stored in original packaging at 21°C (70° F), 50% relative humidity and out of direct sunlight.

产品的储存及有效期

在 21°C(70°F), 相对湿度 50%, 避免被阳光直射条件储存。在上述条件下未开封的本产品可存放一年。

IMPORTANT

Information on the above characteristics is based upon tests we believe to be reliable. The values given are typical values that vary according to application conditions. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine prior to use the suitability of this material for their specific purposes. All Avery Dennison materials described herein are sold subject to Avery Dennison's Conditions of Sales, a copy of which is available upon request.

说明

上述性能信息是基于我们认为可靠的测试, 所得出的数值是典型值, 在不同的应用条件下会有变化。所有数值仅作为信息参考, 并不构成保证或担保。任何买方应在使用前已独立确定该产品对其具体用途是否适用。此处描述的所有艾利丹尼森材料受限于艾利丹尼森的销售条款, 如有要求我们可提供副本。

Please refer to **Tapes.AveryDennison.com** for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2015 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469

For more information on our bonding tapes and adhesive solutions, visit **Tapes.AveryDennison.com**