


Avery Dennison S4455 is a single coated tape with an adhesive-free fingerlift portion, designed as a closure tape and supplied in selfwound rolls.

- Controlled adhesive properties, excellent removable tape performance to a wide variety of substrates
- Low tape release giving a good balance between the requirement for conversion and tab opening for the end-user
- Adhesive-free fingerlift design providing cost effective way for easy opening and closing

CONSTRUCTION:

1. White polypropylene tape with optical brightener and adhesive-free fingerlift, 31 mm
2. Synthetic rubber resin adhesive, 23.5 mm

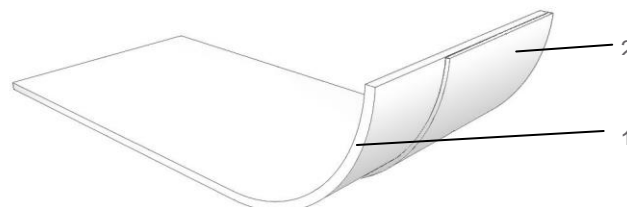

STANDARD FORMAT:

- Roll width: 31 mm
- Fingerlift: 7,5 mm one side
- Roll length: 1000 linear meter
- Inside diameter of the core: 76 mm
- Outside diameter of the roll: 350 mm

PACKAGING:

- Standard export packaging
- Pallet size is 1200 x 800 x 770 mm (height)
- Number of rolls per pallet, 114 rolls
- Re-usable packaging, information available upon request.



Avery Dennison S4455

Physical Properties	Typical Values	Test Methods
CARRIER		
Basis weight	68 gsm	T06/010
ADHESIVE PROPERTIES		
90° peel adhesion on SS	172 N/m	T04/139
Roll unwind	Low	

Note: The listed values are typical only and not intended to serve as product specifications.
Test procedures conform PSTC – ASTM – ISO.

STORAGE AND SHELF LIFE:

The shelf life of the product is one year when stored in original packaging at 15°C-30°C, 30-70% relative humidity and out of direct sunlight.

IMPORTANT:

Information on the above characteristics is based upon tests we believe to be reliable. The values given are typical values that vary according to application conditions. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine prior to use the suitability of this material for their specific purposes. All Avery Dennison materials described herein are sold subject to Avery Dennison Conditions of Sales, a copy of which is available upon request.

Please refer to [Tapes.AveryDennison.com](https://www.tapes.averydennison.com) for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2018 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation.
All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469

For more information on our bonding tapes and adhesive solutions, visit [Tapes.AveryDennison.com](https://www.tapes.averydennison.com)