


**Avery Dennison S715I** is a single coated tape with an adhesive-free fingerlift portion, designed as a closure tape and supplied in selfwound rolls.

- Controlled adhesive properties, excellent removable tape performance to a wide variety of substrates
- Low tape release giving a good balance between the requirement for conversion and tab opening for the end-user
- Adhesive-free fingerlift design providing cost effective way for easy opening and closing

**CONSTRUCTION:**

1. Purple polypropylene tape with adhesive-free fingerlift 4.5 mm
2. Synthetic rubber resin adhesive, 26.5 mm

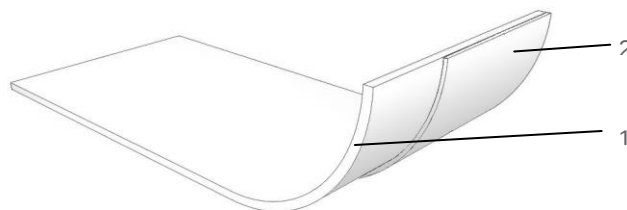

**STANDARD FORMAT:**

- Roll width: 31 mm
- Roll length: 1000 linear meter
- Inside diameter of the core: 76 mm
- Outside diameter of the roll: 380 mm

**PACKAGING:**

- Standard export packaging
- Pallet size is 1200 x 800 x 770 mm (height)
- Number of rolls per pallet, 114 rolls
- Re-usable packaging, information available upon request.



## Avery Dennison S715I

| Physical Properties        | Typical Values | Test Methods |
|----------------------------|----------------|--------------|
| <b>CARRIER</b>             |                |              |
| Basis weight               | 68 gsm         | T06/010      |
| <b>ADHESIVE PROPERTIES</b> |                |              |
| 90° peel adhesion on SS    | 170 N/m        | T04/139      |
| Roll unwind                | Low            |              |

Note: The listed values are typical only and not intended to serve as product specifications.  
Test procedures conform PSTC – ASTM – ISO.

### STORAGE AND SHELF LIFE:

The shelf life of the product is one year when stored in original packaging at 15°C-30°C, 30-70% relative humidity and out of direct sunlight.

### IMPORTANT:

Information on the above characteristics is based upon tests we believe to be reliable. The values given are typical values that vary according to application conditions. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine prior to use the suitability of this material for their specific purposes. All Avery Dennison materials described herein are sold subject to Avery Dennison Conditions of Sales, a copy of which is available upon request.

Please refer to [Tapes.AveryDennison.com](https://www.tapes.averydennison.com) for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2019 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation.  
All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.

**Asia Pacific**  
Kunshan, China,  
NO. 618 Nanhe Road  
Kunshan Economic &  
Technological Zone  
China, 215335  
Phone: +86 512 57155001  
Fax: +86 512 57155059

**Europe**  
Tieblokkenlaan 1  
B-2300 Turnhout  
Belgium  
Phone: +32 (0)14 40 48 11  
Fax: +32 (0)14 40 48 55

**North America**  
250 Chester Street  
Painesville, Ohio  
44077 USA  
Phone: +1 866-462-8379  
Fax: +1 888-358-4469

For more information on our bonding tapes and adhesive solutions, visit [Tapes.AveryDennison.com](https://www.tapes.averydennison.com)