

# Avery Dennison Y3410

**Avery Dennison Y3410** is a full plastic pre-combined diaper closure system, incorporating a Y-bond between fastening and release tape, especially designed for the adult incontinence market.

- Y-bond providing strongest possible bond with diaper chassis
- Nice fingerlift making the product easy to grip, also when wearing gloves
- Fully coloured target tape giving strong visual advantage for opening and later on for repositioning of the closure system
- Release tape adhesive providing excellent adhesion to a wide variety of polyethylene and polypropylene nonwoven substrates
- · Fastening tape customisable with one colour imprint
- Product supplied as a single roll

#### **CONSTRUCTION:**


- 1. Soft white polypropylene tape: 46.5 mm
- 2. Transparent fingerlift strip: 5.8 mm
- 3. Blue polypropylene tape: 33.5 mm
- 4. Clear fingerlift strip: 9 mm
- 5. Clear BOPP tape: 39.5 mm (incl. Y-bond)
- 6. Folding position: 16 mm

### **STANDARD FORMAT:**

- Roll width: 52.5 mm
- · Roll length: 500 linear meter
- Inside diameter of the core: 76 mm
- Outside diameter of the roll: 540 mm

#### **PACKAGING:**

- · Standard export packaging
- Pallet size is 1000 x 1200
- Number of rolls per pallet, 72 rolls

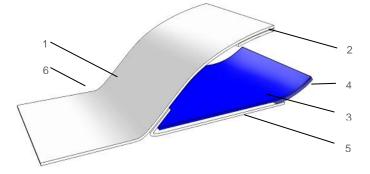



## Avery Dennison Y3410

Physical Properties	Typical Values	Test Methods
PRECOMBINED TAPE	<u>'</u>	
Tab opening release TT/RT	34 N/m	T04/200
FT/TT	230 N/m	T04/205
Roll unwind release	Low	
FASTENING TAPE		
90° peel on PE film	490 N/m	T04/100
TARGET TAPE		
90° peel on PE film	490 N/m	T04/100
RELEASE TAPE		
90° peel on PE film	200 N/m	T04/100

Note: The listed values are typical only and not intended to serve as product specifications. Test procedures conform PSTC – ASTM – ISO.

#### STORAGE AND SHELF LIFE:

The shelf life of the product is one year when stored in original packaging at 15°C-30°C, 30-70% relative humidity and out of direct sunlight.

#### **IMPORTANT:**

Information on the above characteristics is based upon tests we believe to be reliable. The values given are typical values that vary according to application conditions. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine prior to use the suitability of this material for their specific purposes. All Avery Dennison materials described herein are sold subject to Avery Dennison Conditions of Sales, a copy of which is available upon request.

Please refer to **Tapes.AveryDennison.com** for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2018 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation.

All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.

Asia Pacific Kunshan, China, NO. 618 Nanhe Road Kunshan Economic & Technological Zone China, 215335

Phone: +86 512 57155001 Fax: +86 512 57155059 Europe Tieblokkenlaan 1 B-2300 Turnhout Belgium

Phone: +32 (0)14 40 48 11 Fax: +32 (0)14 40 48 55 North America 250 Chester Street Painesville, Ohio 44077 USA

Phone: +1 866-462-8379 Fax: +1 888-358-4469