


**Avery Dennison Y3440** is a full plastic pre-combined diaper closure system, incorporating a Y-bond between fastening and release tape, especially designed for the adult incontinence market.

- Y-bond providing strongest possible bond with diaper chassis
- Extra long fingerlift making the product easy to grip, also when wearing gloves
- Fully coloured target tape giving strong visual advantage for opening and later on for repositioning of the closure system
- Release tape adhesive providing excellent adhesion to a wide variety of polyethylene and polypropylene nonwoven substrates
- Fastening tape customisable with 1 colour imprint
- Product supplied as a single roll

## CONSTRUCTION:

1. Soft white polypropylene tape, 53.5 mm
2. Transparent fingerlift strip, 9 mm
3. Blue polypropylene tape, 39.5 mm
4. Clear fingerlift strip, 12 mm
5. Clear BOPP tape, 39.5 mm (incl. Y Bond)
6. Folding position, 20.5 mm

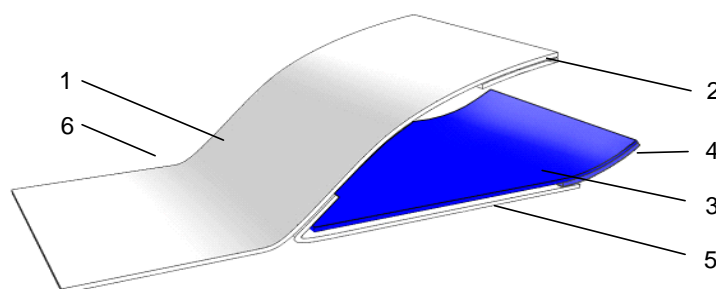

## STANDARD FORMAT:

- Roll width: 62 mm
- Roll length: 600 linear meter
- Inside diameter of the core: 76 mm
- Outside diameter of the roll: 540 mm

## PACKAGING:

- Standard export packaging
- Pallet size is 800 x 1200 x 1150 mm (height)
- Number of rolls per pallet, 30 rolls
- Reusable packaging, information available upon request

Physical Properties	Typical Values	Test Methods
<b>PRECOMBINED TAPE</b>		
Tab opening release TT/RT	34 N/m	T04/200
FT/TT	230 N/m	T04/205
Roll unwind release	Low	
<b>FASTENING TAPE</b>		
90° peel on PE film	490 N/m	T04/100
<b>TARGET TAPE</b>		
90° peel on PE film	490 N/m	T04/100
<b>RELEASE TAPE</b>		
90° peel on PE film	200 N/m	T04/100

Note: The listed values are typical only and not intended to serve as product specifications.  
Test procedures conform PSTC – ASTM – ISO.

## STORAGE AND SHELF LIFE:

The shelf life of the product is one year when stored in original packaging at 15°C-30°C, 30-70% relative humidity and out of direct sunlight.

## IMPORTANT:

Information on the above characteristics is based upon tests we believe to be reliable. The values given are typical values that vary according to application conditions. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine prior to use the suitability of this material for their specific purposes. All Avery Dennison materials described herein are sold subject to Avery Dennison Conditions of Sales, a copy of which is available upon request.

Please refer to **Tapes.AveryDennison.com** for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2018 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation.  
All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.

### Asia Pacific

Kunshan, China,  
NO. 618 Nanhe Road  
Kunshan Economic &  
Technological Zone  
China, 215335  
Phone: +86 512 57155001  
Fax: +86 512 57155059

### Europe

Tieblokkenlaan 1  
B-2300 Turnhout  
Belgium  
Phone: +32 (0)14 40 48 11  
Fax: +32 (0)14 40 48 55

### North America

250 Chester Street  
Painesville, Ohio  
44077 USA  
Phone: +1 866-462-8379  
Fax: +1 888-358-4469