

DESCRIPTION

Avery Dennison® Z6262 is a Z-folded closure system, extendible to about 2 times its original length, mainly used to generate a disposal function on diapers.

产品描述

Avery Dennison® Z6262是一种Z型的贴合系统，胶带展开后可伸长至原来长度的2倍，主要用于包裹后丢弃使用过的训练裤/拉拉裤。

CONSTRUCTION

- 1 - Tape unit 1
- 2 - Blue coloured fingerlift
- 3 - Tape unit 2 (incl. Y-bond fold)
- 4 - Tape unit 3:


Folded width	62 mm
Unfolded width	164 mm

结构组成

- 胶带 1
- 蓝色手指剥离条
- 胶带 2（包括折叠部分）
- 胶带 3

折叠宽度	62 mm
展开宽度	164 mm

* All above dimensions are typical values, only for reference.

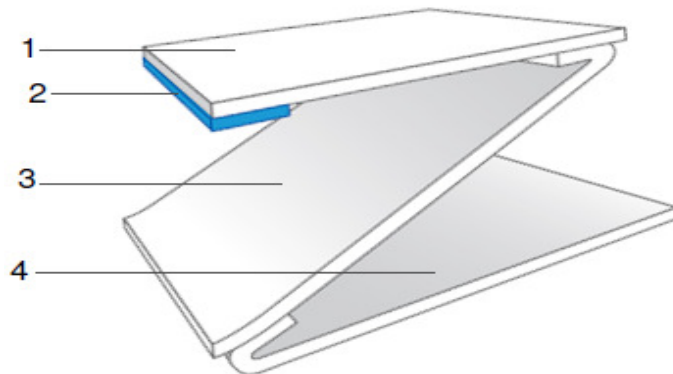

FEATURES & BENEFITS

- Pre-folded Z-shaped construction, extendible to about 2 times its original size allowing to bridge and wrap large parcels (wrapping and disposal tape applications).
- Anti-flagging adhesive/silicone bond in the Z-fold construction eliminates pop-opens during conversion.
- Blue coloured fingerlift highlighting the opening position in the tape.
- Adhesive of the permanent and fastening area providing an optimal closure on polyethylene and polypropylene non-woven backsheets.

产品的特点与优点

- Z型的折叠结构，能使胶带展开后伸长至原来长度的2倍，使用完训练裤/拉拉裤后，可卷起后用Z型贴粘住，便于收纳与丢弃。
- Z型贴选用硅油和胶黏剂的极佳组合，在生产制造训练裤/拉拉裤时，不会产生胶带被打开的现象。
- 蓝色手指剥离条更为方便简单的找到打开的位置。
- 永久端的固定胶带粘接剂提供安全理想的粘接效果，它能与聚乙烯 (PE)、聚丙烯 (PP) 等无纺布材料很好的粘接在一起。

STANDARD FORMAT

Roll width / 卷宽: 62mm
Roll length / 卷长: 300 m

产品规格

Inside diameter of the core / 内径: 76 mm
Outside diameter of the roll / 外径: 445 mm

PHYSICAL PROPERTIES 物理性能	TYPICAL VALUES 典型数值	UNITS 单位	TEST METHODS 测试方法
--------------------------------	---------------------------	-------------	-------------------------

Fastening Tape / 固定胶带:

90° Peel on PE Film* (of unit 1) / 胶带 1 的剥离力(PE 膜*)	360	N/m	T04/100
90° Tab opening release(T1 from T2) / 胶带 1 在胶带 2 上的离型力	64	N/m	T04/202
90° Tab opening release(T2 from T3) / 胶带 2 在胶带 3 上的离型力	20	N/m	T04/202

Laminating Tape / 复合胶带:

90° Peel on PE Film* (of unit 3) / 胶带 3 的剥离力 (PE 膜*)	520	N/m	T04/100
---	-----	-----	---------

* Avery Dennison® Standard Poly film.

STORAGE and SHELF LIFE

One year when stored in original packaging at 21°C (70° F), 50% relative humidity and out of direct sunlight.

产品的储存及有效期

在 21°C(70°F), 相对湿度 50%, 避免被阳光直射条件储存。在上述条件下未开封的本产品可存放一年。

IMPORTANT

Information on the above characteristics is based upon tests we believe to be reliable. The values given are typical values that vary according to application conditions. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine prior to use the suitability of this material for their specific purposes. All Avery Dennison materials described herein are sold subject to Avery Dennison's Conditions of Sales, a copy of which is available upon request.

说明

以上数据是在我公司认为可靠的试验中得到的。在不同的使用环境中这些指标会有不同, 因此以上数据仅作参考, 而不作任何保证和承担任何担保责任。购买者必须独立决定该产品对其具体使用目的之适用性。

Please refer to **Tapes.AveryDennison.com** for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2015 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469

For more information on our bonding tapes and adhesive solutions, visit **Tapes.AveryDennison.com**