

## DESCRIPTION

*Avery Dennison® S4443 is a single coated tape with an adhesive-free fingerlift portion, designed as a reseal tape and supplied in selfwound rolls.*

## 产品描述

*Avery Dennison® S4443 是一种单面涂布胶带，有一段漏涂胶的手指剥离边。它是一种快易贴胶带，以自解卷的形式供应。*


## CONSTRUCTION

- 1 white polypropylene tape 31 mm  
with adhesive-free fingerlift
- 2 synthetic rubber resin adhesive 26.5mm

## 结构组成

- 白色聚丙烯胶带 31 mm  
(漏涂胶的手指剥离边)
- 合成橡胶树脂胶粘剂 26.5mm

\* All above dimensions are typical values with  $\pm 2.0\text{mm}$  tolerance

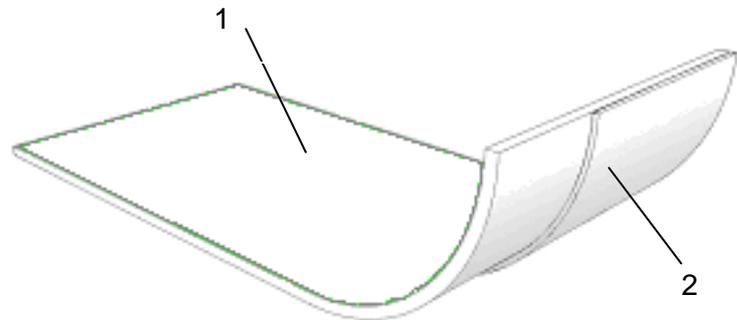

## FEATURES & BENEFITS

- Controlled adhesive properties, excellent removable tape performance to non-woven wrapping substrates.
- Low tape release gives a good balance between the requirement for conversion and tab opening for the end-user.
- Our adhesive-free fingerlift design provides a cost effective way for easy opening and closing.

## 产品的特点与优点

- 优异的可移除胶带性能，应用于无纺布类的包裹材料。
- 胶带的离型力低，良好的平衡了成品转换和终端客户使用的需求。
- 漏涂胶的手指剥离边的设计为客户提供了一个简便有效的使用方式。

## STANDARD FORMAT

Roll width / 卷宽: 31mm  
 Roll length / 卷长: 1200 m

## 产品规格

Inside diameter of the core / 内径: 76 mm  
 Outside diameter of the roll / 外径: 400 mm

## PACAKAGING

Pallet Size / 栈板尺寸: 1000 X 1200 mm (大包装)  
 No. rolls/pallet / 每栈板卷数: 120 rolls

## 包装

PHYSICAL PROPERTIES 物理性能	TYPICAL VALUES 典型数值	UNITS 单位	TEST METHODS 测试方法
-----------------------------	------------------------	-------------	----------------------

**Adhesive properties / 胶粘剂性能:**

90° peel on stainless steel / 在不锈钢板上的 90°剥离力	500	N/m	T04/139
Roll unwind / 解卷力	low		

**STORAGE and SHELF LIFE**

One year when stored in original packaging at 21°C (70° F), 50% relative humidity and out of direct sunlight.

**产品的储存及有效期**

在 21°C(70°F), 相对湿度 50%, 避免被阳光直射条件储存。在上述条件下未开封的本产品可存放一年。

**IMPORTANT**

Information on the above characteristics is based upon tests we believe to be reliable. The values given are typical values that vary according to application conditions. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine prior to use the suitability of this material for their specific purposes. All Avery Dennison materials described herein are sold subject to Avery Dennison's Conditions of Sales, a copy of which is available upon request.

**说明**

上述性能信息是基于我们认为可靠的测试, 所得出的数值是典型值, 在不同的应用条件下会有变化。所有数值仅作为信息参考, 并不构成保证或担保。任何买方应在使用前已独立确定该产品对其具体用途是否适用。此处描述的所有艾利丹尼森材料受限于艾利丹尼森的销售条款, 如有要求我们可提供副本。

Please refer to [Tapes.AveryDennison.com](http://Tapes.AveryDennison.com) for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2015 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance  
Tapes

**Asia Pacific**  
Kunshan, China,  
NO. 618 Nanhe Road  
Kunshan Economic &  
Technological Zone  
China, 215335  
Phone: +86 512 57155001  
Fax: +86 512 57155059

**Europe**  
Tieblokkenlaan 1  
B-2300 Turnhout  
Belgium  
Phone: +32 (0)14 40 48 11  
Fax: +32 (0)14 40 48 55

**North America**  
250 Chester Street  
Painesville, Ohio  
44077 USA  
Phone: +1 866-462-8379  
Fax: +1 888-358-4469

For more information on our bonding tapes and adhesive solutions, visit [Tapes.AveryDennison.com](http://Tapes.AveryDennison.com)