

**Avery Dennison Y4272 Wave C** is a precombined pressure sensitive tape designed as a closure system for disposable diapers, incorporating a Y-bond between fastening and release tape.

- Smooth release of the fastening tape off release tape, with easy to grasp fingerlift
- Precombined construction eliminating the need of laminating individual fastening and release tapes on-line
- Y-bond providing strongest bond with diaper chassis
- Fastening tape adhesive providing optimal and safe re-usable closure on reinforced frontal tape
- Excellent adhesion of release tape to wide variety of polyethylene and polypropylene nonwoven substrates
- Soft fastening carrier allows easy conversion avoiding tab tear and misplacement
- Smooth feeling of the fastening carrier, important to protect the baby's skin
- Designed for a variety of landing zones, especially for release coated frontal tapes/films

### CONSTRUCTION:


1. Soft transparent polypropylene tape, 62 mm (top of wave, 63 mm)
2. Blue fingerlift strip, 7 mm (top of wave, 8 mm)
3. White polypropylene tape, 39 mm
4. Folding position, 19 mm

### STANDARD FORMAT:

- Roll width: 63 mm
- Roll length: 750 linear meter
- Inside diameter of the core: 76 mm
- Outside diameter of the roll: 480 mm

### PACKAGING:

- Standard export packaging
- Pallet size is 1200 x 1000 x 1150 mm (height)
- Number of rolls per pallet, 60 rolls

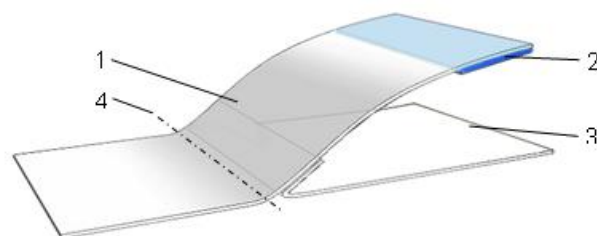



## Avery Dennison Y4272 Wave C

Physical Properties	Typical Values	Test Methods
<b>PRECOMBINED TAPE</b>		
Tab opening release	2500 g/m	T04/205
Roll unwind release	Low	
<b>FASTENING TAPE</b>		
90° peel on PE film	430 N/m	T04/100
<b>RELEASE TAPE</b>		
90° peel on PE film	340 N/m	T04/100

Note: The listed values are typical only and not intended to serve as product specifications. Test procedures conform PSTC – ASTM – ISO.

### STORAGE AND SHELF LIFE:

The shelf life of the product is one year when stored in original packaging at 15°C-30°C, 30-70% relative humidity and out of direct sunlight.

### IMPORTANT:

Information on the above characteristics is based upon tests we believe to be reliable. The values given are typical values that vary according to application conditions. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine prior to use the suitability of this material for their specific purposes. All Avery Dennison materials described herein are sold subject to Avery Dennison Conditions of Sales, a copy of which is available upon request.

Please refer to [Tapes.AveryDennison.com](https://www.tapes.averydennison.com) for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2018 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.

#### Asia Pacific

Kunshan, China,  
NO. 618 Nanhe Road  
Kunshan Economic &  
Technological Zone  
China, 215335  
Phone: +86 512 57155001  
Fax: +86 512 57155059

#### Europe

Tieblokkenlaan 1  
B-2300 Turnhout  
Belgium  
Phone: +32 (0)14 40 48 11  
Fax: +32 (0)14 40 48 55

#### North America

250 Chester Street  
Painesville, Ohio  
44077 USA  
Phone: +1 866-462-8379  
Fax: +1 888-358-4469

For more information on our bonding tapes and adhesive solutions, visit [Tapes.AveryDennison.com](https://www.tapes.averydennison.com)